

DATASHEET

Accessories for Rally AI Cameras

The Logitech Rally AI Camera family includes a full suite of accessories to support flexible camera placement across a wide range of room sizes and configurations. Multiple mounting and extension options provide the convenience of camera deployments at scale.

Accessories that suit every meeting space

From wall, ceiling, and recessed mounts to pivot and TV mounting options, plus extended USB connectivity, these accessories simplify professional installations while enabling reliable, scalable camera deployments.

logitech



Rally AI Cameras Extension Kit

Rally AI Cameras Extension Kit is a USB extender that enables Rally AI Camera and Rally AI Camera Pro to connect up to 100 meters from a host device with a Cat cable. It supports flexible camera placement across larger or more complex rooms, simplifying installations while maintaining reliable performance over extended distances.

Compatible with	Rally AI Camera Rally AI Camera Pro
Dimensions	**Camera side** Height: 72 mm (2.8 in) Width: 211 mm (8.3 in) Depth: 20 mm (0.8 in) **Host side** Height: 68 mm (2.7 in) Width: 120 mm (4.7 in) Depth: 20 mm (0.8 in)
Ports and interfaces	**Camera side** USB: 1 x USB-C RJ45: 2 x RJ45 **Host side** USB: 1 x USB-C RJ45: 2 x RJ45
What's in the box	Rally AI Cameras Extension Kit Mounting hardware User documentation Graphite device cosmetic sleeve USB-C cable 6″ Cat 6A cable 6″ USB-C to A cable 6′
	Extension cable type: Cat 6A
	Extension cable max distance: 100 m
Part numbers	Worldwide: 952-000332 China: 952-000333 Japan: 952-000334



Rally AI Cam Pro Recess Mount

Rally AI Cam Pro Recess Mount securely mounts the camera while minimizing its visual footprint and discreetly blending into the room's overall design.

Compatible with	Rally AI Camera Pro
Dimensions	Height: 324 mm (12.8 in) Width: 283 mm (11.1 in) Depth: 108 mm (4.2 in) Depth within wall: 101 mm (4.0 in) Depth out of wall: 7 mm (0.3 in)
What's in the box	Rally AI Camera Pro Recess Mount Mounting hardware User documentation
Part numbers	Worldwide: 952-000313 China: 952-000314 Japan: 952-000315



Rally AI Cam Recess Mount

Rally AI Cam Recess Mount securely houses Rally AI Camera within the wall, hiding cabling and minimizing visible hardware to enable seamless integration into the room design.

Compatible with	Rally AI Camera
Dimensions	Height: 171 mm (6.7 in) Width: 283 mm (11.1 in) Depth: 85 mm (3.3 in) Depth within wall: 80 mm (3.1 in) Depth out of wall: 5 mm (0.2 in)
What's in the box	Rally AI Camera Recess Mount Mounting hardware User documentation
Part numbers	Worldwide: 952-000310 China: 952-000311 Japan: 952-000312



Rally AI Cameras Jbox Mount

Rally AI Cameras JBox Mount enables direct mounting of Rally AI Camera and Rally AI Camera Pro to standard electrical junction boxes for quick, clean wall installations. It provides a secure mounting solution that simplifies placement while maintaining a professional appearance and easy cable management. Attaches to single or dual jboxes in vertical or horizontal orientations.

Compatible with	Rally AI Camera Rally AI Camera Pro
Dimensions	Height: 102 mm (4 in) Width: 139 mm (5.5 in) Depth: 10 mm (0.4 in)
What's in the box	Rally AI Cameras Jbox Mount Mounting hardware User documentation
	Extension cable type:
	Extension cable max distance:
Part numbers	Worldwide: 952-000328 China: 952-000329 Japan: 952-000330



Rally AI Cameras Pivot Mount

Rally AI Cameras Pivot Mount enables direct wall or gang-box mounting with adjustable positioning. Easily pivot the camera 30° left or right toward the area of interest and unlock even better framing in your conferencing spaces.

Compatible with	Rally AI Camera Rally AI Camera Pro
Dimensions	Height: 115 mm (4.5 in) Width: 209 mm (8.2 in) Depth: 98 mm (3.9 in)
What's in the box	Rally AI Cameras Pivot Mount Mounting hardware User documentation
Part numbers	Worldwide: 952-000319 China: 952-000320 Japan: 952-000321

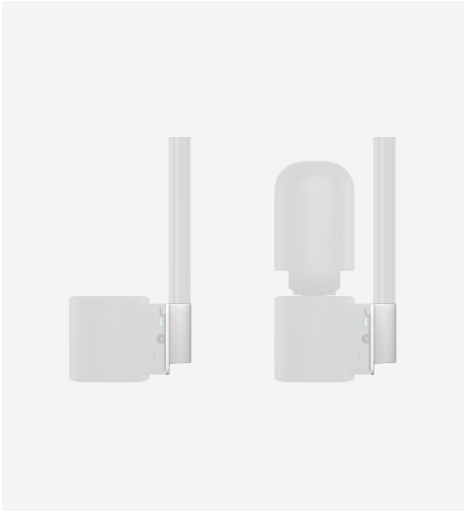

Rally AI Cameras Ceiling Mount

Rally AI Cameras Ceiling Mount securely mounts Rally AI Camera or Rally AI Camera Pro from installer-supplied ¾-inch or 1½-inch pipe for optimal placement and unobstructed sightlines. Made for right-side-up installation on both drywall and drop ceilings, it delivers flexible, professional mounting for a wide range of room configurations.

Compatible with	Rally AI Camera Rally AI Camera Pro
Dimensions	Height: 74 mm (2.9 in) Width: 175 mm (6.9 in) Depth: 42 mm (1.6 in)
What's in the box	Rally AI Cameras Ceiling Mount Mounting hardware User documentation
Part numbers	Worldwide: 952-000322 China: 952-000323 Japan: 952-000324

WARRANTY

2-year limited hardware on accessories for Rally AI Cameras.

logitech

logitech.com/business

Contact your reseller
Or contact us at
www.logitech.com/business

Logitech Americas
3930 North First Street,
San Jose, CA 95134

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2026 Logitech. Logitech, Logi, and all other Logitech trademarks and logos are trademarks or registered trademarks of Logitech Europe S.A. or its affiliates in the U.S. and/or other countries. All other third-party trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing, and feature information contained herein is subject to change without notice.

Published January 2026



DATASHEET

Rally AI Camera Pro

Rally AI Camera Pro is an intelligent PTZ camera with powerful optics built for larger, more complex spaces. It delivers crystal clear video with an advanced dual-camera system and 15x hybrid zoom. It uses AI-based RightSight 2 technology from Logitech to intelligently focus and frame people in a meeting room as if they were up close, supporting better meeting equity. Simple integration with conference audio systems makes it easy to deploy intelligent video and pro audio together, while occupancy insights can drive workplace automation.

- **Powerful optics:** Enjoy crystal-clear video with a powerful dual-camera system combining an optical camera and a digital camera with one-inch imaging sensor.
- **Intelligent video with AI-based RightSight 2:** Automatically frame groups, individuals, and presenters for more productive, person-to-person interactions.
- **Single- and multi-camera deployments:** Use on its own — or in combination with other Logitech cameras in larger, complex spaces to capture presenters and participants from multiple angles.
- **Choice and flexibility:** Set up quickly with USB or a CAT cable[1] with an audio system of your choice.
- **Centralized insights and management:** Manage Rally AI Camera Pro directly in Logitech Sync to easily configure, monitor, and update the device.

Microsoft zoom Google Meet

logitech



Powerful optics

Enjoy crystal-clear video with an advanced dual-camera system. No matter where you place Rally AI Camera Pro, its combination of an optical camera and a digital camera with one-inch sensor ensures faces and details remain sharp. The 15x hybrid zoom[2] ensures interactions are captured with clarity, whether participants are near or far, seated up close or across the room.



Intelligent video with RightSight 2

Bring intelligent video to larger, more complex spaces with AI-based RightSight 2 technology to ensure everyone in the room is seen clearly. Rally AI Camera Pro automatically frames groups, individuals, and presenters for more productive, person-to-person interactions.



Flexible coverage and connection

Video-enable large and complex spaces easily. Set up video quickly with USB or a single CAT cable (with the optional Rally AI Camera Extension Kit). Choose the conference audio system you prefer, whether from Logitech or one of our pro audio partners[3]. Plus, place the camera wherever you need it, with mounting options for wall, TV, and ceiling.



Made for both single- and multi-camera deployments

Rally AI Camera Pro is made for high-value spaces like larger conference rooms, training rooms, and classrooms. In these spaces, Rally AI Camera Pro by itself may be sufficient. But it also works brilliantly in multi-camera setups where you want to capture presenters, instructors, and participants from multiple angles. And you can enable multi-camera experiences[3] like Zoom Intelligent Director and Microsoft Teams multiple camera view for a more complete view of the room.



Centralized insights and management

Manage Rally AI Camera Pro directly in Logitech Sync to easily configure, monitor, and update the camera alongside your other meeting room devices. The camera also provides Sync with device status and insights about room usage and occupancy. This data helps inform workplace analytics and automation so organizations can make strategic decisions about office space.

Dimensions	Height	231 mm (9.1 in)
	Width	224 mm (8.8 in)
	Depth	Sleep mode: 101 mm (4 in), In use mode: 146 mm (5.7 in)
	Lens depth	113 mm (4.4 in)
Camera Resolution	4K, 1440p, 1080p, 900p, 720p, and SD at 30fps	
Motorized PTZ Camera	Sensor	8mp
	Pan	±90°
	Tllt	+50°/-90°
	Zoom	15x (5x optical x 3x digital)
	dFOV	90°
	hFOV	82°
	vFOV	52°
	Total room coverage (field of view + pan & tilt)	Horizontal: 262°, vertical: 192°
	Focal length	Wide: 3.725 mm, Tele: 17.88 mm
Digital PTZ Camera	Sensor	20mp, 1 inch
	Zoom	4X HD digital zoom
	dFOV	Diagonal: 115.7°
	hFOV	Horizontal: 103.3°
	vFOV	Vertical: 60.7°

Part Numbers		
Region	**Graphite**	**Off-White**
US, Canada, Mexico	960-001756	960-001775
Argentina, Chile	960-001757	960-001776
Indonesia, Korea, European Union	960-001758	960-001777
Taiwan	960-001759	960-001778
Hong Kong, United Kingdom, Southeast Asia	960-001767	960-001779
Brazil	960-001768	960-001780
South Africa, Namibia	960-001769	960-001781
Switzerland	960-001770	960-001782
Australia, New Zealand	960-001771	960-001783
India	960-001772	960-001784
Thailand	960-001773	960-001785
Israel	960-001788	960-001789
China	960-001760	960-001786
Japan	960-001761	960-001787

Microphones	Frequency response	90 Hz–16 kHz
	Sensitivity	>-36 dBFS +/-1 dB @ 1 Pa
	Microphone data rate output	48 KHz
	Beamforming elements	8 omnidirectional digital MEMS
	Audio processing	Beamforming + direction of arrival (used for camera framing)
Interfaces	USB	3.2 Gen 1
	Wi-Fi	802.11 a/b/g/n/ac/ax
	Bluetooth Low Energy (BLE)	5.3
Power & Cables	Power supply	POE++
	Operating voltage/power	100 - 240 V
	Power supply dimensions	140 mm (5.5 in) x 35 mm (1.4 in) x 53 mm (2.1 in)
	AC cable	1 m (3.3 ft)
	USB C to USB C	2 m (6.5 ft) USB 3.2 Gen 1
	CAT cable	3 m (9.8 ft)) CAT 6A
Environmental	Operating temperature	0 to 35 °C
	Storage temperature	-40 to 70 °C
	Humidity	10 to 95%
	BTU/hr	34 idle, 68 in the meeting
Security	Full disk encryption	AES-128
	Data encryption	Symmetric Keys, PKI
	Device identity	Protected by device attestation
	Device access	Authenticated using API
	Key protection	Arm TrustZone, Secure Storage

[1] Connecting Rally AI Camera Pro with a CAT cable is available with the optional Rally AI Camera Extension Kit.
[2] 15x hybrid zoom is achieved through a combination of 5x optical zoom and 3x digital zoom.
[3] For the latest information on certifications and compatibility, visit logitech.com/support/vc-certifications

logitech

logitech.com/RallyAICameraPro

Contact your reseller
Or contact us at
www.logitech.com/business

Logitech Americas
3930 North First Street,
San Jose, CA 95134

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2026 Logitech. Logitech, Logi, and all other Logitech trademarks and logos are trademarks or registered trademarks of Logitech Europe S.A. or its affiliates in the U.S. and/or other countries. All other third-party trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing, and feature information contained herein is subject to change without notice.

Published January 2026